




BIS 300

Silicone-impregnated fiberglass sleeving




- high temperature resistance
- highly flexible
- cut-through resistant
- halogen-free

Specifications

Description	BIS 300
Material	fiberglass / silicone-impregnated
Operating temp. Min.	-70°C
Operating temp. Max.	+300°C (peaks at +450°C)
Dielectric strength	>0.6 KV
Approvals / Standards	  

Colours

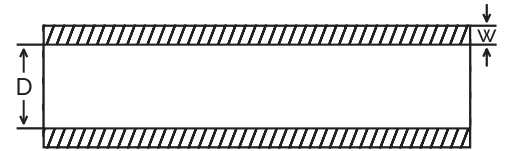

TYPE	Inner diameter (D)	wallthickness (w) nom.	Packing unit
BIS 300	(mm)	(mm)	(Meter)
0.5	0.5 + 0.20	0.20	400
1.0	1.0 + 0.20	0.25	300
1.5	1.5 + 0.20	0.25	300
2.0	2.0 + 0.20	0.25	300
2.5	2.5 + 0.20	0.25	300
3.0	3.0 + 0.20	0.25	300
3.5	3.5 + 0.30	0.25	300
4.0	4.0 + 0.30	0.30	300
4.5	4.5 + 0.30	0.30	300
5.0	5.0 + 0.30	0.30	200
6.0	6.0 + 0.30	0.30	200
7.0	7.0 + 0.30	0.30	200
8.0	8.0 + 0.30	0.30	100
9.0	9.0 + 0.50	0.30	100
10.0	10.0 + 0.50	0.30	100
12.0	12.0 + 0.50	0.45	100
14.0	14.0 + 0.50	0.45	100
16.0	16.0 + 1.00	0.45	100
18.0	18.0 + 1.00	0.55	100
20.0	20.0 + 1.00	0.55	100
22.0	22.0 + 1.00	0.60	50
25.0	25.0 + 1.00	0.60	50

070/J723/10/05.2020