


- flame-retardant
- resistant to chemical and mechanical conditions
- high temperature resistance
- thin wall

### Specifications

Description	BPVDF 190
Material	PVDF (Polyvinylidene fluoride)
Shrink ratio	2:1
Operating temp. Min.	-55°C
Operating temp. Max.	+190°C
Shrink temp. Min.	+175°C
Flammability	Flame-retardant
Longitudinal change	+/-5% max.
Tensile strength	>30 MPa
Dielectric strength	>33 kV/mm
Adhesive coating	no
Approvals / Standards	



### Colours

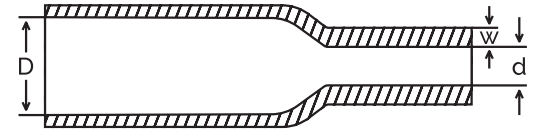

TYPE	on delivery	after shrink			
BPVDF 190	Ø (D) min. (mm)	Ø (d) max. (mm)	Wall thickness (w) nom. (mm)	Packaging unit (Meter)	Packaging unit lengths (Meter)
3/64	1,20	0,60	0,25	400	1,22
1/16	1,60	0,80	0,25	300	1,22
3/32	2,40	1,20	0,27	200	1,22
1/8	3,20	1,60	0,27	150	1,22
3/16	4,80	2,40	0,27	75	1,22
1/4	6,40	3,20	0,33	75	1,22
3/8	9,50	4,80	0,33	75	1,22
1/2	12,70	6,40	0,33	50	1,22

On request, we can print and cut this heat-shrink tubing according to your specifications.