


- high shrink ratio
- medium-wall

Specifications

Description	BPMW
Material	Polyolefin, medium-wall
Shrink ratio	3:1
Operating temp. Min.	-55°C
Operating temp. Max.	+110°C
Shrink temp. Min.	+120°C
Flammability	not flame-retardant
Longitudinal change	+/-10% max.
Tensile strength	>12,0 MPa
Dielectric strength	>20,0 kV/mm
Adhesive coating	no
Approvals / Standards	



Colours

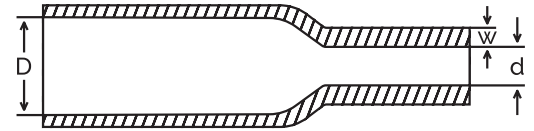

TYPE	on delivery	after shrink		
BPMW	Ø (D) min. (mm)	Ø (d) max. (mm)	Wall thickness (w) nom. (mm)	Packaging unit lengths (Meter)
9/3	9.00	3.00	1.90	1.22
12/4	12.00	4.00	2.00	1.22
16/5	16.00	5.00	2.20	1.22
22/6	22.00	6.00	2.50	1.22
28/6	28.00	6.00	2.50	1.22
33/8	33.00	8.00	2.50	1.22
40/12	40.00	12.00	2.70	1.22
45/13	45.00	13.00	2.70	1.22
55/16	55.00	16.00	2.80	1.22
65/19	65.00	19.00	2.80	1.22
75/22	75.00	22.00	3.00	1.22
85/25	85.00	25.00	3.00	1.22
95/25	95.00	25.00	3.00	1.22
115/34	115.00	34.00	3.20	1.22
140/42	140.00	42.00	3.30	1.22
160/50	160.00	50.00	3.30	1.22
175/58	175.00	58.00	3.30	1.22
200/65	200.00	65.00	3.30	1.22
230/75	230.00	75.00	3.70	1.22
265/75	265.00	265.00	3.80	1.22
300/85	300.00	300.00	3.80	1.22
350/95	350.00	350.00	4.20	1.22

On request, we can print and cut this heat-shrink tubing according to your specifications.