




- high shrink ratio
- thick-wall

Specifications

Description	BPTW
Material	Polyolefin, thick-wall
Shrink ratio	3:1
Operating temp. Min.	-55°C
Operating temp. Max.	+110°C
Shrink temp. Min.	+120°C
Flammability	not flame-retardant
Longitudinal change	+/-10% max.
Tensile strength	>12,0 MPa
Dielectric strength	>20,0 kV/mm
Adhesive coating	no
Approvals / Standards	



Colours

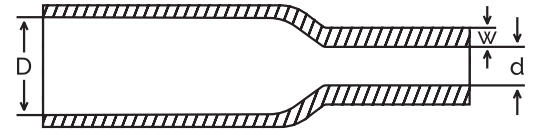

TYPE	on delivery	after shrink		
BPTW	Ø (D) min. (mm)	Ø (d) max. (mm)	Wall thickness (w) nom. (mm)	Packaging unit lengths (Meter)
9/3	9.00	3.00	2.00	1.22
13/4	13.00	4.00	2.40	1.22
22/6	22.00	6.00	2.70	1.22
33/8	33.00	8.00	3.20	1.22
40/12	40.00	12.00	4.00	1.22
55/16	55.00	16.00	4.00	1.22
75/22	75.00	22.00	4.00	1.22
85/25	85.00	25.00	4.20	1.22
95/30	95.00	30.00	4.20	1.22
115/34	115.00	34.00	4.10	1.22
130/36	130.00	36.00	4.10	1.22
175/50	175.00	50.00	4.10	1.22
200/60	200.00	60.00	4.10	1.22
235/65	235.00	65.00	4.10	1.22
265/75	265.00	75.00	4.30	1.22
300/85	300.00	85.00	4.40	1.22
350/100	350.00	100.00	4.50	1.22

On request, we can print and cut this heat-shrink tubing according to your specifications.