


- extreme thin wall
- Halogen-free
- environmentally friendly

### Specifications

Description	BPPET
Material	PET
Shrink ratio	2:1
Operating temp. Min.	-40°C
Operating temp. Max.	+125°C
Shrink temp. Min.	+100°C
Flammability	flammable
Longitudinal change	+/-10% max.
Adhesive coating	no
Approvals / Standards	



### Colours

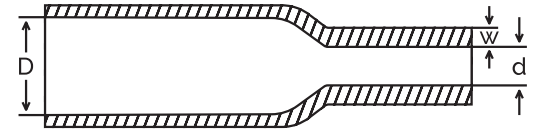

### TYP

BPPET	Wall thickness (w) nom. (mm)	Schrinkage ratio
3.0 to 14.0 mm	0.05 to 0.07 mm	45 +/- 5 %
15.0 to 24.0 mm	0.05 to 0.10 mm	45 +/- 5 %
25.0 to 39.0 mm	0.07 to 0.12 mm	45 +/- 5 %
40.0 to 54.0 mm	0.05 to 0.12 mm	45 +/- 5 %
55.0 to 74.0 mm	0.05 to 0.12 mm	45 +/- 5 %
75.0 to 91.0 mm	0.05 to 0.12 mm	45 +/- 5 %
92.0 to 149.0 mm	0.05 to 0.12 mm	45 +/- 5 %

Conversion: flat width = diameter x 1,57079  
 diameter = flat width x 0,6366

On request, we can print and cut this heat-shrink tubing according to your specifications..