




- Y-Verteiler für Wellrohr

Technische Daten

Beschreibung	WS Y
Material	PA 6
Einsatztemp. Min.	-40°C
Einsatztemp. Max.	+105°C
Zulassungen / Normen	



Farben

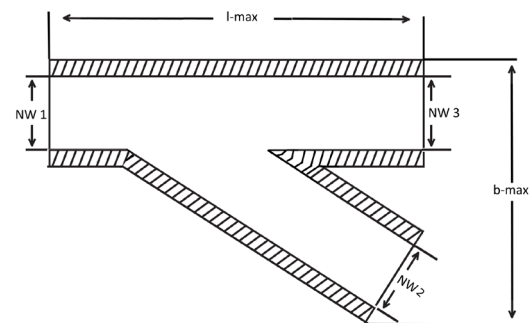

TYP	NW 1	NW 2	NW 3	b-max	l-max	VPE
WS Y	(mm)	(mm)	(mm)	(mm)	(mm)	(Stück)
4,5 - 4,5 - 4,5	4,5	4,5	4,5	27,4	25,6	1000
7,5 - 4,5 - 4,5	7,5	4,5	4,5	30,5	28,5	1000
7,5 - 4,5 - 7,5	7,5	4,5	7,5	30,5	28,5	1000
7,5 - 7,5 - 7,5	7,5	7,5	7,5	33,5	30,8	1000
8,5 - 8,5 - 8,5	8,5	8,5	8,5	34,5	31,5	1000
10,0 - 7,5 - 10,0	10,0	7,5	10,0	36,6	32,5	1000
10,0 - 8,5 - 8,5	10,0	8,5	8,5	34,5	31,5	1000
10,0 - 8,5 - 10,0	10,0	8,5	10,0	36,6	32,5	1000
10,0 - 10,0 - 10,0	10,0	10,0	10,0	36,4	32,5	1000
13,0 - 7,5 - 7,5	13,0	7,5	7,5	37,4	32,5	1000
13,0 - 7,5 - 10,0	13,0	7,5	10,0	37,4	32,5	1000
13,0 - 8,5 - 8,5	13,0	8,5	8,5	37,4	33,8	1000
13,0 - 8,5 - 10,0	13,0	8,5	10,0	35,8	33,8	1000
13,0 - 8,5 - 13,0	13,0	8,5	13,0	35,8	33,8	1000
13,0 - 10,0 - 10,0	13,0	10,0	10,0	37,4	32,5	1000
13,0 - 10,0 - 13,0	13,0	10,0	13,0	37,4	32,5	1000
13,0 - 13,0 - 13,0	13,0	13,0	13,0	43,0	40,0	1000

070/J499/011/05.2020



- Y-Verteiler für Wellrohr


Technische Daten

Beschreibung	WS Y
Material	PA 6
Einsatztemp. Min.	-40°C
Einsatztemp. Max.	+105°C

Zulassungen / Normen



Farben

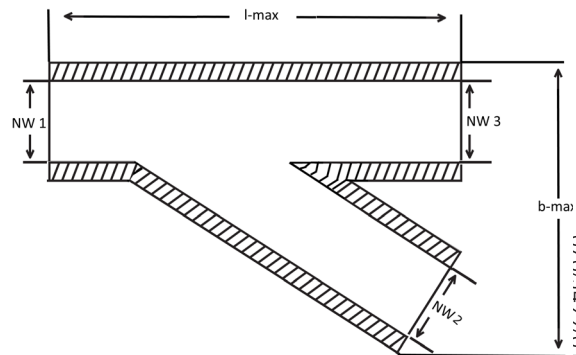

TYP	NW 1	NW 2	NW 3	b-max	l-max	VPE
WS Y	(mm)	(mm)	(mm)	(mm)	(mm)	(Stück)
17,0 - 8,5 - 13,0	17,5	8,5	13,0	39,5	35,0	1000
17,0 - 10,0 - 10,0	17,0	10,0	10,0	40,4	33,0	1000
17,0 - 10,0 - 13,0	17,0	10,0	13,0	40,4	33,0	1000
17,0 - 10,0 - 17,0	17,0	10,0	17,0	46,1	37,0	1000
17,0 - 13,0 - 10,0	17,0	13,0	10,0	39,0	36,0	1000
17,0 - 13,0 - 13,0	17,0	13,0	13,0	42,0	37,0	1000
17,0 - 13,0 - 17,0	17,0	13,0	17,0	47,7	39,0	1000
17,0 - 17,0 - 10,0	17,0	13,0	10,0	41,5	38,0	1000
17,0 - 17,0 - 17,0	17,0	17,0	17,0	51,3	44,0	1000
22,0 - 7,5 - 22,0	22,0	7,5	22,0	48,3	33,0	1000
22,0 - 10,0 - 17,0	22,0	10,0	17,0	46,0	32,0	1000
22,0 - 10,0 - 22,0	22,0	10,0	22,0	50,5	35,0	1000
22,0 - 13,0 - 17,0	22,0	13,0	17,0	47,5	40,0	1000
22,0 - 13,0 - 22,0	22,0	13,0	22,0	52,4	37,0	1000
22,0 - 17,0 - 17,0	22,0	17,0	17,0	51,3	44,0	1000
22,0 - 22,0 - 22,0	22,0	22,0	22,0	58,5	49,0	1000
26,0 - 10,0 - 26,0	26,0	10,0	26,0	54,5	41,0	1000
26,0 - 22,0 - 17,0	26,0	22,0	17,0	54,5	43,0	1000
26,0 - 22,0 - 22,0	26,0	22,0	22,0	58,5	49,0	1000
29,0 - 13,0 - 26,0	29,0	13,0	26,0	57,5	40,0	1000

07/01/1499/011/05.2020