




- Y manifold for corrugated conduits

Specifications

Description	WS Y
Material	PA 6
Operating temp. Min.	-40°C
Operating temp. Max.	+105°C
Approvals / Standards	



Colours

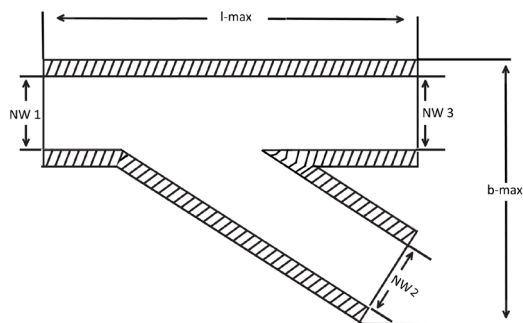

TYPE	NW 1	NW 2	NW 3	b-max	l-max	VPE
WS Y	(mm)	(mm)	(mm)	(mm)	(mm)	(pieces)
4.5 - 4.5 - 4.5	4.5	4.5	4.5	27.4	25.6	1000
7.5 - 4.5 - 4.5	7.5	4.5	4.5	30.5	28.5	1000
7.5 - 4.5 - 7.5	7.5	4.5	7.5	30.5	28.5	1000
7.5 - 7.5 - 7.5	7.5	7.5	7.5	33.5	30.8	1000
8.5 - 8.5 - 8.5	8.5	8.5	8.5	34.5	31.5	1000
10.0 - 7.5 - 10.0	10.0	7.5	10.0	36.6	32.5	1000
10.0 - 8.5 - 8.5	10.0	8.5	8.5	34.5	31.5	1000
10.0 - 8.5 - 10.0	10.0	8.5	10.0	36.6	32.5	1000
10.0 - 10.0 - 10.0	10.0	10.0	10.0	36.4	32.5	1000
13.0 - 7.5 - 7.5	13.0	7.5	7.5	37.4	32.5	1000
13.0 - 7.5 - 10.0	13.0	7.5	10.0	37.4	32.5	1000
13.0 - 8.5 - 8.5	13.0	8.5	8.5	37.4	33.8	1000
13.0 - 8.5 - 10.0	13.0	8.5	10.0	35.8	33.8	1000
13.0 - 8.5 - 13.0	13.0	8.5	13.0	35.8	33.8	1000
13.0 - 10.0 - 10.0	13.0	10.0	10.0	37.4	32.5	1000
13.0 - 10.0 - 13.0	13.0	10.0	13.0	37.4	32.5	1000
13.0 - 13.0 - 13.0	13.0	13.0	13.0	43.0	40.0	1000

070/J499/110/05.2020




- Y manifold for corrugated conduits

Specifications

Description	WS Y
Material	PA 6
Operating temp. Min.	-40°C
Operating temp. Max.	+105°C
Approvals / Standards	



Colours

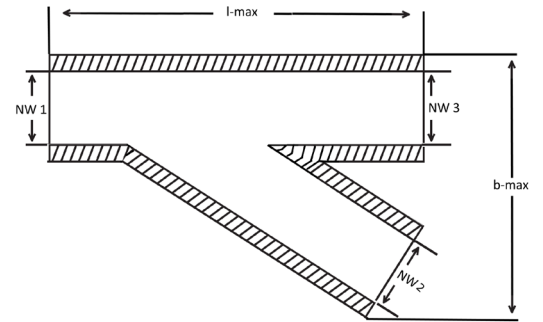

TYPE	NW 1	NW 2	NW 3	b-max	l-max	VPE
WS Y	(mm)	(mm)	(mm)	(mm)	(mm)	(Stück)
17.0 - 8.5 - 13.0	17.5	8.5	13.0	39.5	35.0	1000
17.0 - 10.0 - 10.0	17.0	10.0	10.0	40.4	33.0	1000
17.0 - 10.0 - 13.0	17.0	10.0	13.0	40.4	33.0	1000
17.0 - 10.0 - 17.0	17.0	10.0	17.0	46.1	37.0	1000
17.0 - 13.0 - 10.0	17.0	13.0	10.0	39.0	36.0	1000
17.0 - 13.0 - 13.0	17.0	13.0	13.0	42.0	37.0	1000
17.0 - 13.0 - 17.0	17.0	13.0	17.0	47.7	39.0	1000
17.0 - 17.0 - 10.0	17.0	13.0	10.0	41.5	38.0	1000
17.0 - 17.0 - 17.0	17.0	17.0	17.0	51.3	44.0	1000
22.0 - 7.5 - 22.0	22.0	7.5	22.0	48.3	33.0	1000
22.0 - 10.0 - 17.0	22.0	10.0	17.0	46.0	32.0	1000
22.0 - 10.0 - 22.0	22.0	10.0	22.0	50.5	35.0	1000
22.0 - 13.0 - 17.0	22.0	13.0	17.0	47.5	40.0	1000
22.0 - 13.0 - 22.0	22.0	13.0	22.0	52.4	37.0	1000
22.0 - 17.0 - 17.0	22.0	17.0	17.0	51.3	44.0	1000
22.0 - 22.0 - 22.0	22.0	22.0	22.0	58.5	49.0	1000
26.0 - 10.0 - 26.0	26.0	10.0	26.0	54.5	41.0	1000
26.0 - 22.0 - 17.0	26.0	22.0	17.0	54.5	43.0	1000
26.0 - 22.0 - 22.0	26.0	22.0	22.0	58.5	49.0	1000
29.0 - 13.0 - 26.0	29.0	13.0	26.0	57.5	40.0	1000