




- soft and flexible
- PVC - End caps
- easy to attach
- good insulation properties
- in many Standard- and Special colors
- with hardness from 70° Shore A to 85° Shore A

Specifications

Description	PVC - End caps
Material	Soft PVC
Operating temp. Min.	-20°C
Operating temp. Max.	+65°C
Flammability	flame retardant
Approvals / Standarts	



Colours

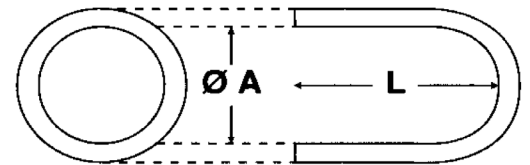

A	L min	L max
1,5	10,0	20,0
1,8	10,0	20,0
2,0	10,0	20,0
2,5	10,0	27,0
3,0	10,0	20,0
3,5	10,0	55,0
3,5	10,0	27,0
4,0	10,0	55,0
4,5	10,0	65,0
5,0	10,0	100,0
5,5	10,0	90,0
6,0	10,0	125,0
6,4	10,0	45,0
6,5	10,0	105,0
7,0	10,0	95,0
7,5	10,0	60,0
8,0	10,0	120,0
8,5	10,0	50,0
8,7	10,0	120,0
9,0	10,0	115,0
9,5	10,0	50,0
10,0	10,0	113,0
11,0	10,0	45,0
12,0	10,0	115,0
13,0	10,0	50,0
13,0	10,0	105,0
15,0	10,0	65,0
14,0	10,0	108,0
15,0	10,0	140,0
16,0	10,0	145,0
17,0	10,0	55,0
18,0	10,0	195,0

A	L min	L max
19,0	10,0	145,0
20,0	10,0	130,0
21,0	10,0	135,0
21,9	10,0	145,0
22,0	10,0	65,0
23,0	10,0	50,0
24,0	10,0	160,0
25,0	10,0	175,0
26,0	10,0	140,0
27,0	10,0	185,0
29,2	10,0	140,0
30,0	10,0	155,0
31,0	10,0	155,0
32,0	10,0	185,0
33,0	10,0	185,0
34,0	10,0	90,0
35,0	10,0	135,0
38,0	10,0	180,0
39,0	10,0	170,0
40,0	10,0	100,0
42,0	10,0	75,0
45,0	10,0	65,0
48,0	10,0	170,0
48,0	10,0	130,0
50,0	10,0	60,0
50,0	10,0	105,0
51,0	10,0	170,0
52,0	10,0	205,0
53,0	10,0	80,0
55,0	10,0	45,0
58,0	10,0	115,0
60,0	10,0	95,0

A	L min	L max
62,0	10,0	58,0
64,0	10,0	92,0
65,0	10,0	210,0
68,0	10,0	58,0
70,0	10,0	90,0
72,0	10,0	60,0
76,0	10,0	95,0
78,0	10,0	70,0
80,0	10,0	40,0
82,5	10,0	88,0
84,0	10,0	90,0
87,0	10,0	95,0
90,0	10,0	155,0
95,0	10,0	155,0
100,0	10,0	155,0
105,0	10,0	155,0
108,0	10,0	50,0
110,0	10,0	150,0
114,0	10,0	250,0
115,0	10,0	125,0
120,0	10,0	125,0
119,0	10,0	120,0
125,0	10,0	60,0
125,0	10,0	125,0
127,0	10,0	155,0
135,0	10,0	125,0
139,7	10,0	95,0
141,0	10,0	150,0
168,0	10,0	120,0
178,0	10,0	150,0
267,0	10,0	170,0